



next generation led



IP20 RGB
10mm 14.4W/m
60LED/m CRI90



IP67 neon side
10W/m 6x12mm
CRI90



IP67 neon top
18W/m 13x07mm
CRI90

summer 2019

Next Generation LED LED strips catalog

More light with less energy for a greener world



IP20 8mm
4.8W/m
60LED/m CRI90



IP20 8mm
9.6W/m
70LED/m CRI98



IP20 10mm
12W/m
180LED/m CRI90



IP20 10mm
15W/m
240LED/m CRI90



IP20 10mm
18W/m
300LED/m CRI90



IP20 10mm
19.2W/m
140LED/m CRI98



next generation led

info@nextgenerationled.be

www.nextgenerationled.be

Tel + 32 53 71 09 42

INDEX

● Low Power, IP20, 2835 60LED/m, 4.8W/m, 8mm PCB	p3
● Low Power, IP20, 2835 120LED/m, 9.6W/m, 8mm PCB	p4
● IP20, 2835 60LED/m, 14.4W/m, 10mm PCB	p5
● IP20, 2835 120LED/m, 19.2W/m, 10mm PCB	p6
● RGB, IP20, 5050 60LED/m, 14.4W/m, 10mm PCB	p7
● IP20, 2110 120LED/m, 7.2W/m, 4mm PCB	p8
● IP20, 2110 180LED/m, 12W/m, 10mm PCB	p9
● IP20, 2110 240LED/m, 15W/m, 10mm PCB	p10
● IP20, 2110 300LED/m, 18W/m, 10mm PCB	p11
● Nature led strip with violet chip, IP20, 2835 70LED/m, 9.6W/m, 8mm PCB	p12
● Nature led strip with violet chip, IP20, 2835 140LED/m, 19.2W/m, 10mm PCB	p13
● Neon strip side view, 06*12mm, 10W/m, IP67	p14
● Neon strip side view, 08*16mm, 12W/m, IP67	p15
● Neon strip side view, 10*18mm, 14W/m, IP67	p16
● Neon strip top view, 13*07mm, 18W/m, IP67	p17
● Neon strip top view, 10*10mm, 14W/m, IP67	p18
● Neon strip top view, 16*16mm, 16W/m, IP67	p19





next generation led

info@nextgenerationled.be
www.nextgenerationled.be
Tel + 32 53 71 09 42


Low power 4.8W/m
8mm 60LED/m IP20

Properties

- High CRI; CRI>90
- High Efficiency, Up to 100lm/w
- High color consistency, within 5 steps SDCM (3 steps Optional)



DIMENSION

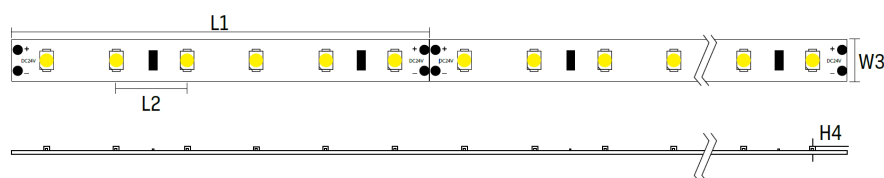

Specifications

L1(mm)	L2(mm)	W3(mm)	H4(mm)
100	16.7	8	1.4

Technical details

2200K	2400K	2700K	3000K	4000K	5000K	6000K
LUMENS PER METER(lm/M)						
330	350	380	400	410	440	430

Applications

Office, showroom, meeting room, hallway,

Updated: July 2019





next generation led

info@nextgenerationled.be

www.nextgenerationled.be

Tel + 32 53 71 09 42


Low power 9.6W/m
8mm 120LED/m IP20

Properties

- High CRI; CRI>90
- High Efficiency, Up to 100lm/w
- High color consistency, within 5 steps SDCM (3 steps Optional)



DIMENSION

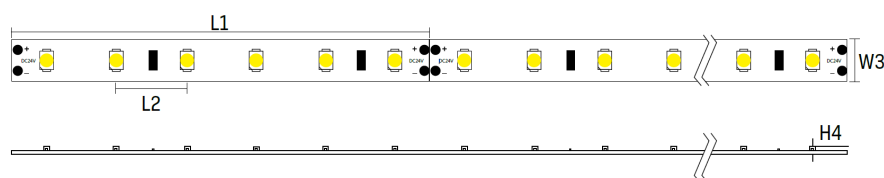

Specifications

L1(mm)	L2(mm)	W3(mm)	H4(mm)
50	8.3	8	1.4

Technical details

● 2200K	● 2400K	● 2700K	● 3000K	● 4000K	● 5000K	● 6000K
LUMENS PER METER(lm/M)						
640	680	770	800	840	900	880

Applications

Office, showroom, meeting room,
hallway, ...

Updated: July 2019





next generation led

info@nextgenerationled.be
www.nextgenerationled.be
Tel + 32 53 71 09 42


14.4W/m 10mm
60LED/m IP20

Properties

- High CRI; CRI>90
- High Efficiency, Up to 100lm/w
- High color consistency, within 5 steps SDCM (3 steps Optional)



DIMENSION

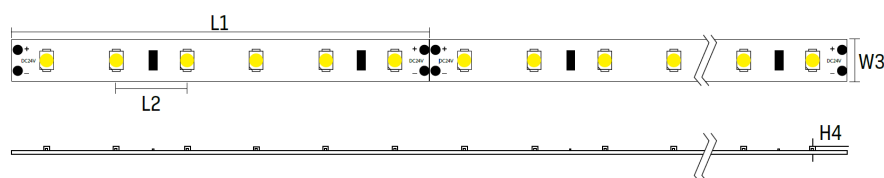

Specifications

L1(mm)	L2(mm)	W3(mm)	H4(mm)
100	16.7	10	1.4

Technical details

2200K	2400K	2700K	3000K	4000K	5000K	6000K
LUMENS PER METER(lm/M)						
1000	1060	1180	1210	1300	1350	1320

Applications

Office, showroom, meeting room,
hallway, ...

Updated: July 2019





next generation led

info@nextgenerationled.be

www.nextgenerationled.be

Tel + 32 53 71 09 42


19.2W/m 10mm
120LED/m IP20

Properties

- High CRI; CRI>90
- High Efficiency, Up to 100lm/w
- High color consistency, within 5 steps SDCM (3 steps Optional)



DIMENSION

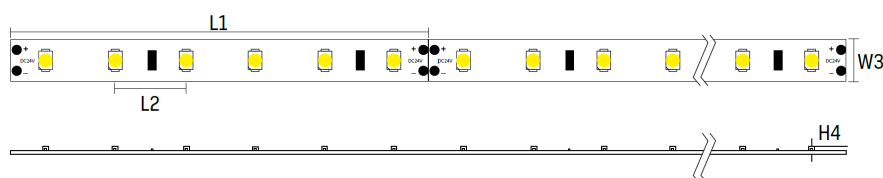

Specifications

L1(mm)	L2(mm)	W3(mm)	H4(mm)
50	8.3	10	1.4

Technical details

2200K	2400K	2700K	3000K	4000K	5000K	6000K
LUMENS PER METER(lm/M)						
1550	1730	1800	1870	1910	1970	1920

Applications

Office, showroom, meeting room,
hallway, ...

Updated: July 2019





next generation led

info@nextgenerationled.be
www.nextgenerationled.be
Tel + 32 53 71 09 42


RGB 14.4W/m 10mm
60LED/m IP20

Properties

- Self-packaging RGB, with high consistency of wavelength, bright and pure color
- The overall color jump and gradient can be realized by the controller



DIMENSION

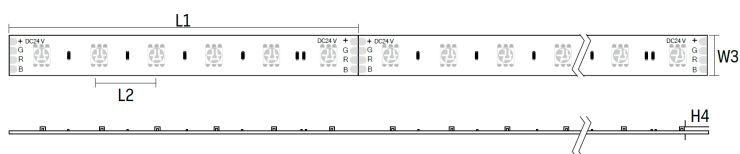

Specifications

L1(mm)	L2(mm)	W3(mm)	H4(mm)
100	16.7	10	2.1

Technical details

● 2400K ● 2700K ● 3000K ● 4000K ● 5000K ● 6000K ● Red ● Green ● Blue


LUMENS PER METER(lm/m)

130 330 70

Applications

Hotel, restaurant, bar, bedroom, etc...

Updated: July 2019

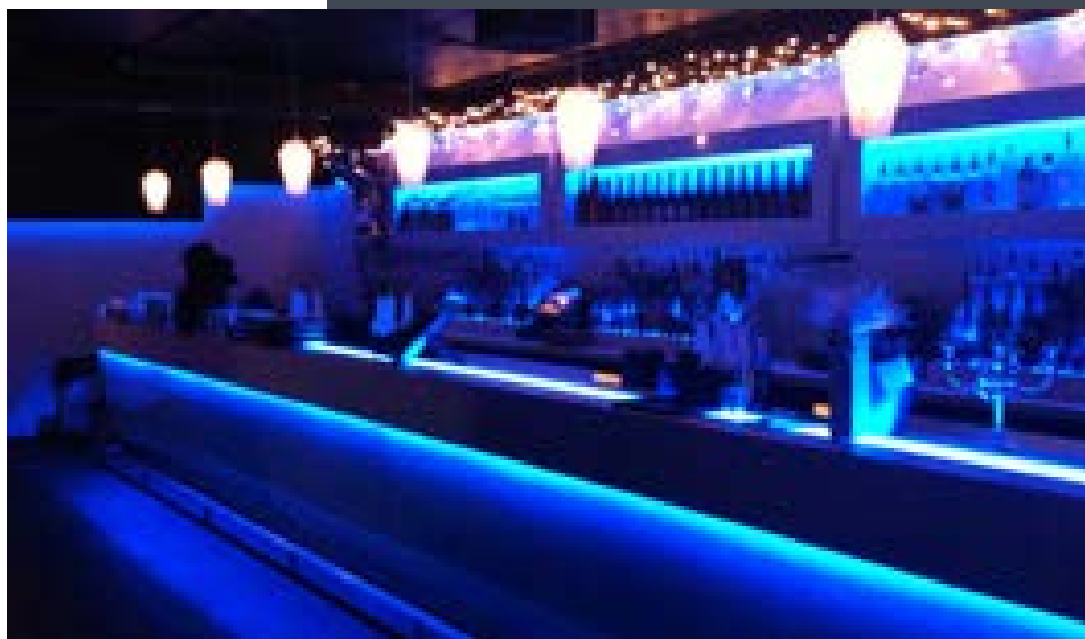



next generation led

info@nextgenerationled.be
www.nextgenerationled.be
Tel + 32 53 71 09 42


7.2W/m 4mm
120LED/m IP20

Properties

- Slim PCB, suitable for more compact lighting space.
- With high density LEDs, can match profiles and milky cover to achieve a more uniform lighting effect.



DIMENSION

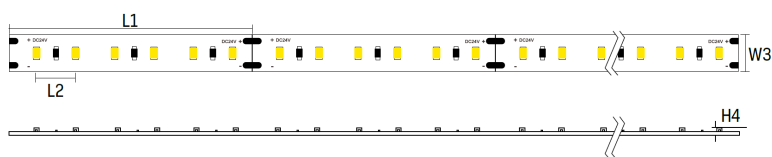

Specifications

L1(mm)	L2(mm)	W3(mm)	H4(mm)
50	8.3	4	1

Technical details

2200K	2400K	2700K	3000K	4000K	5000K	6000K
LUMENS PER METER(lm/M)						
500	520	530	580	620	610	600

Applications

Office, showroom, meeting room,
hallway, ...

Updated: July 2019





next generation led

info@nextgenerationled.be

www.nextgenerationled.be

Tel + 32 53 71 09 42


12W/m 10mm
180LED/m IP20

Properties

- Slim PCB, suitable for more compact lighting space.
- With high density LEDs, can match profiles and milky cover to achieve a more uniform lighting effect.



DIMENSION

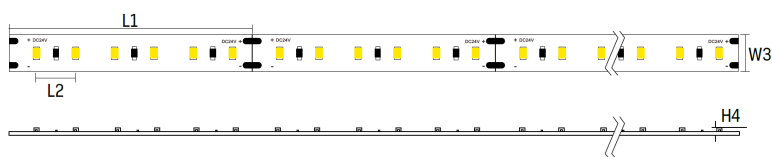

Specifications

L1(mm)	L2(mm)	W3(mm)	H4(mm)
33.3	5.6	10	1

Technical details

2200K	2400K	2700K	3000K	4000K	5000K	6000K
LUMENS PER METER(lm/M)						
800	850	870	960	1030	1010	1000

Applications

Office, showroom, meeting room,
hallway, ...

Updated: July 2019





next generation led

info@nextgenerationled.be

www.nextgenerationled.be

Tel + 32 53 71 09 42


15W/m 10mm
240LED/m IP20

Properties

- Slim PCB, suitable for more compact lighting space.
- With high density LEDs, can match profiles and milky cover to achieve a more uniform lighting effect.



DIMENSION

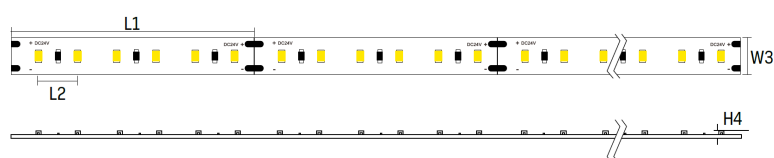

Specifications

L1(mm)	L2(mm)	W3(mm)	H4(mm)
25	4.2	10	1

Technical details

● 2200K	● 2400K	● 2700K	● 3000K	● 4000K	● 5000K	● 6000K
LUMENS PER METER(lm/M)						
980	1050	1070	1170	1260	1240	1200

Applications

Office, showroom, meeting room,
hallway, ...

Updated: July 2019





next generation led

info@nextgenerationled.be

www.nextgenerationled.be

Tel + 32 53 71 09 42


18W/m 10mm
300LED/m IP20

Properties

- Slim PCB, suitable for more compact lighting space.
- With high density LEDs, can match profiles and milky cover to achieve a more uniform lighting effect.



DIMENSION

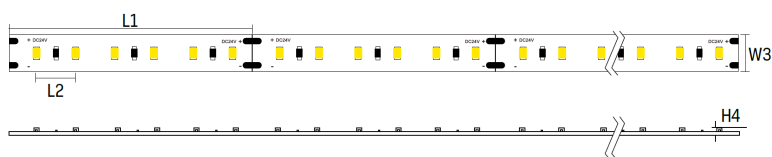

Specifications

L1(mm)	L2(mm)	W3(mm)	H4(mm)
20	3.3	10	1

Technical details

2200K	2400K	2700K	3000K	4000K	5000K	6000K
LUMENS PER METER(lm/M)						
1170	1270	1340	1460	1540	1500	1490

Applications

Office, showroom, meeting room,
hallway, ...

Updated: July 2019





next generation led

info@nextgenerationled.be
www.nextgenerationled.be
Tel + 32 53 71 09 42


CRI98 9.6W/m 8mm
70LED/m IP20

Properties

- Under constant current condition, brightness output is more stable, life is longer.
- High brightness consistency between different units and batches, more suitable for large projects.
- Highly fitted to the visible spectrum, making the illuminated object closer to the color under natural light.
- Higher Color fidelity, $R_f > 95$.
- Higher color saturation, $R_g \geq 100$.
- Low blue light spectrum, healthy lighting.



DIMENSION

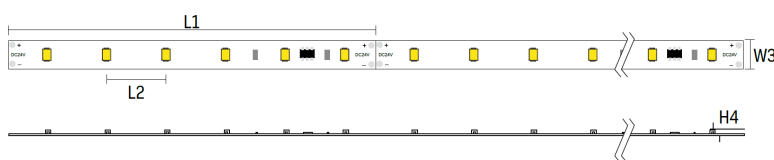

Specifications

L1(mm)	L2(mm)	W3(mm)	H4(mm)
100	16.7	8	1.4


Technical details

2200K	2400K	2700K	3000K	4000K	5000K	6000K
LUMENS PER METER(lm/M)						
-	-	740	760	780	810	800

Applications

Office, showroom, meeting room,
hallway, ...

Updated: July 2019

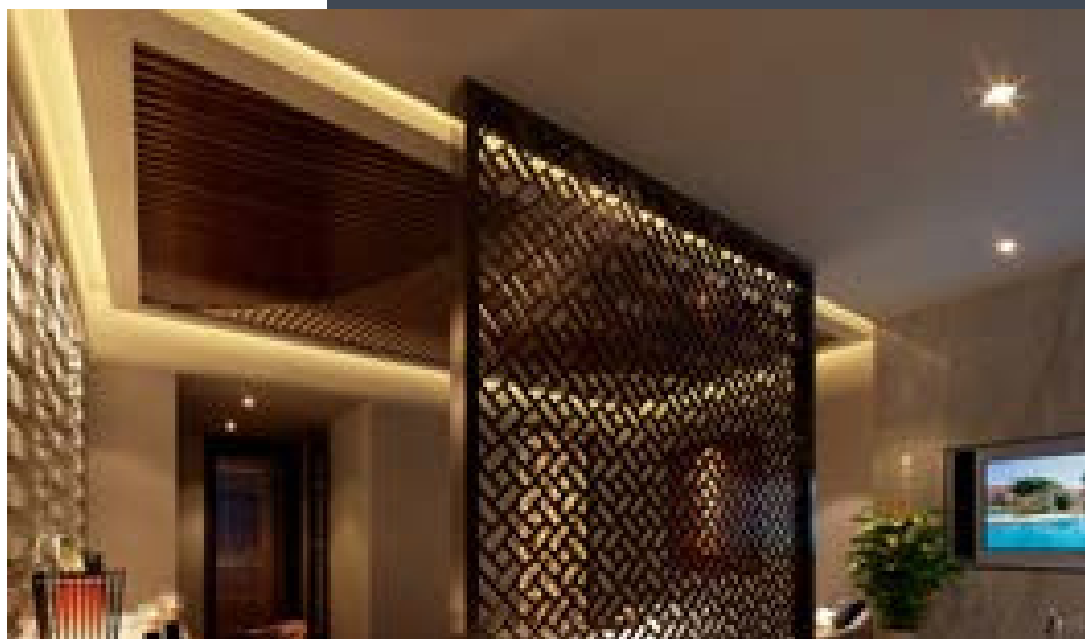



next generation led

info@nextgenerationled.be
www.nextgenerationled.be
Tel + 32 53 71 09 42


CRI98 19.2W/m
10mm 140LED/m
IP20

Properties

- Under constant current condition, brightness output is more stable, life is longer.
- High brightness consistency between different units and batches, more suitable for large projects.
- Highly fitted to the visible spectrum, making the illuminated object closer to the color under natural light.
- Higher Color fidelity, $R_f > 95$.
- Higher color saturation, $R_g \geq 100$.
- Low blue light spectrum, healthy lighting.



DIMENSION

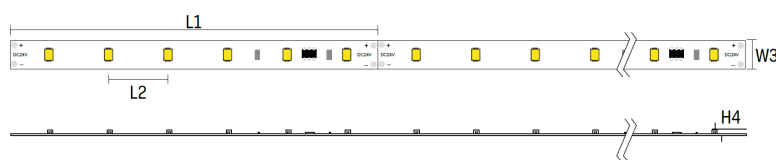

Specifications

L1(mm)	L2(mm)	W3(mm)	H4(mm)
50	8.3	10	1.4


Technical details

2200K	2400K	2700K	3000K	4000K	5000K	6000K
LUMENS PER METER(lm/M)						
-	-	1480	1500	1550	1520	1520

Applications

Office, showroom, meeting room, hallway, ...

Updated: July 2019

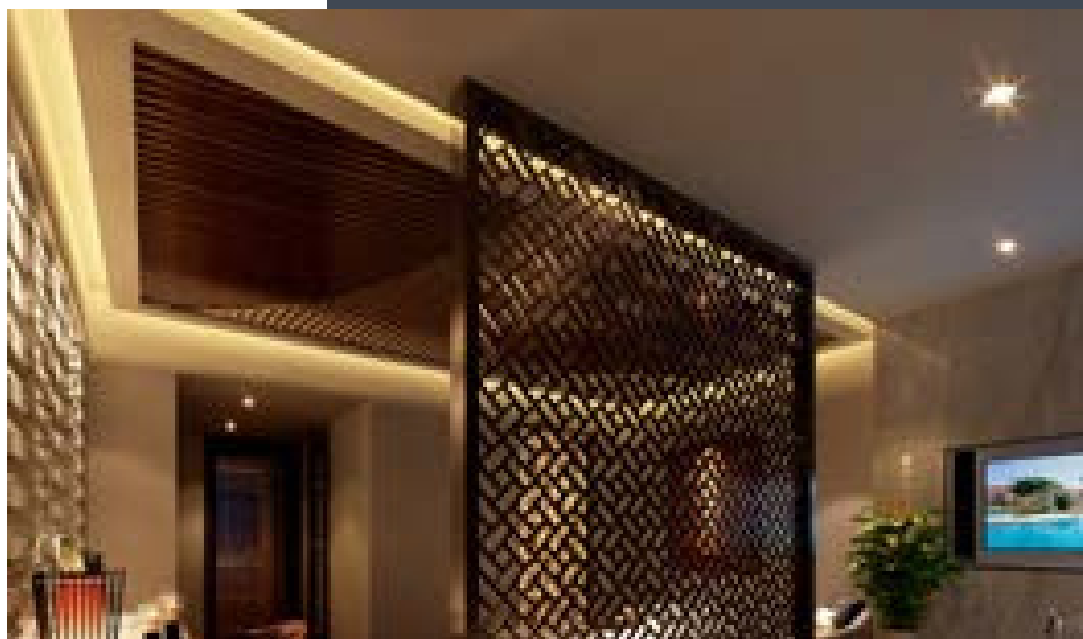



next generation led

info@nextgenerationled.be

www.nextgenerationled.be

Tel + 32 53 71 09 42


Neon strip side view 6x12mm 10W/m IP67

Properties

- Seamless and uniform light output, dot free
- Bendable at horizontal direction
- IP67 protection
- Robust housing with high quality silicon, UV proof for true outdoor application




DIMENSION

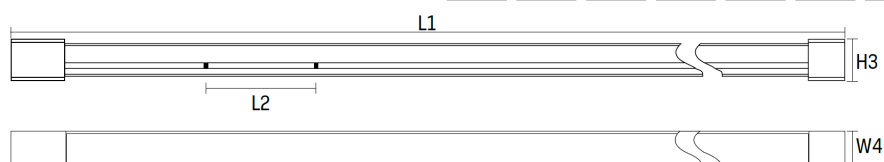

Specifications

L1(mm)	L2(mm)	H3(mm)	W4(mm)
5050	50	12	6


Technical details



Applications

Office, showroom, meeting room,
hallway, ...

Updated: July 2019

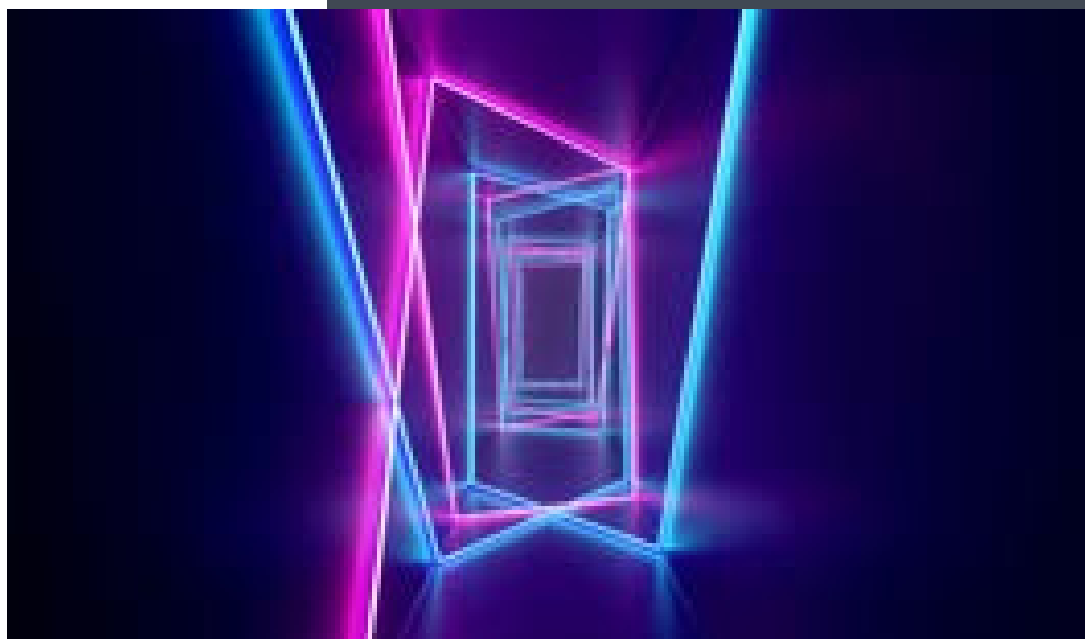



next generation led

info@nextgenerationled.be

www.nextgenerationled.be

Tel + 32 53 71 09 42


Neon strip side view 8x16mm 12W/m IP67

Properties

- Seamless and uniform light output, dot free
- Bendable at horizontal direction
- IP67 protection
- Robust housing with high quality silicon, UV proof for true outdoor application



DIMENSION

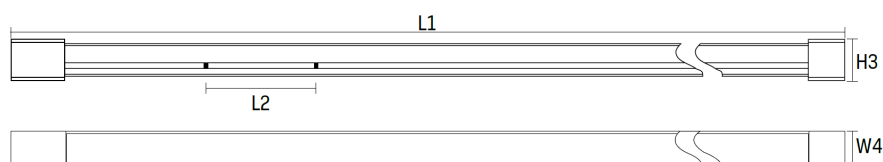

Specifications

L1(mm)	L2(mm)	H3(mm)	W4(mm)
5050	50	16	8


Technical details

2700K	3000K	4000K	5000K	6000K
LUMENS PER METER(lm/M)				
520	520	540	530	530

Applications

Office, showroom, meeting room,
hallway, ...

Updated: July 2019

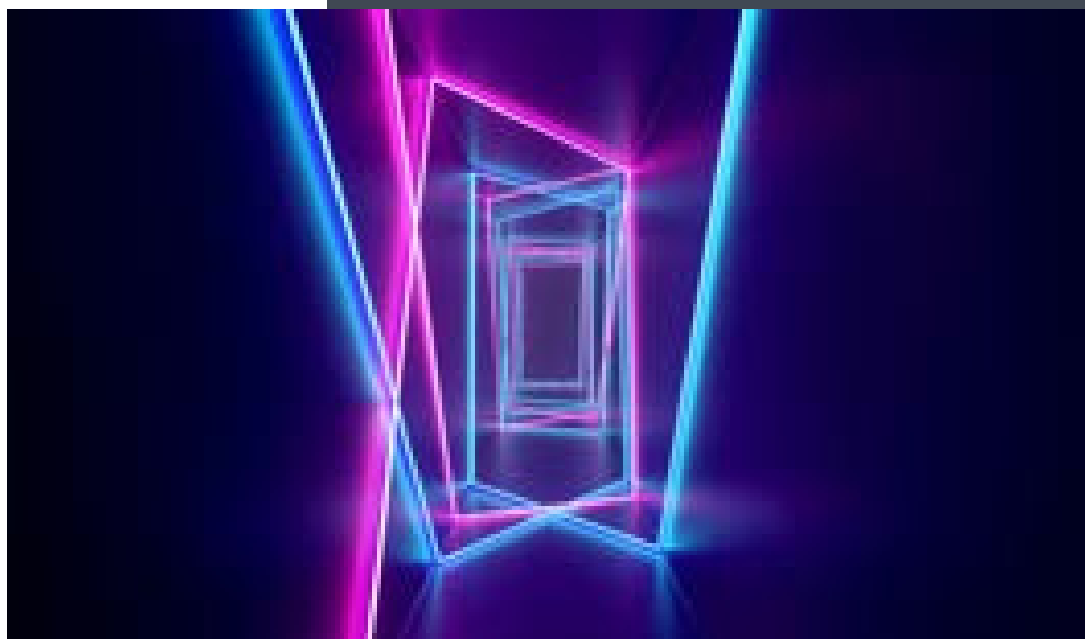




next generation led

info@nextgenerationled.be
www.nextgenerationled.be
Tel + 32 53 71 09 42


Neon strip side view 10x18mm 14W/m IP67

Properties

- Seamless and uniform light output, dot free
- Bendable at horizontal direction
- IP67 protection
- Robust housing with high quality silicon, UV proof for true outdoor application

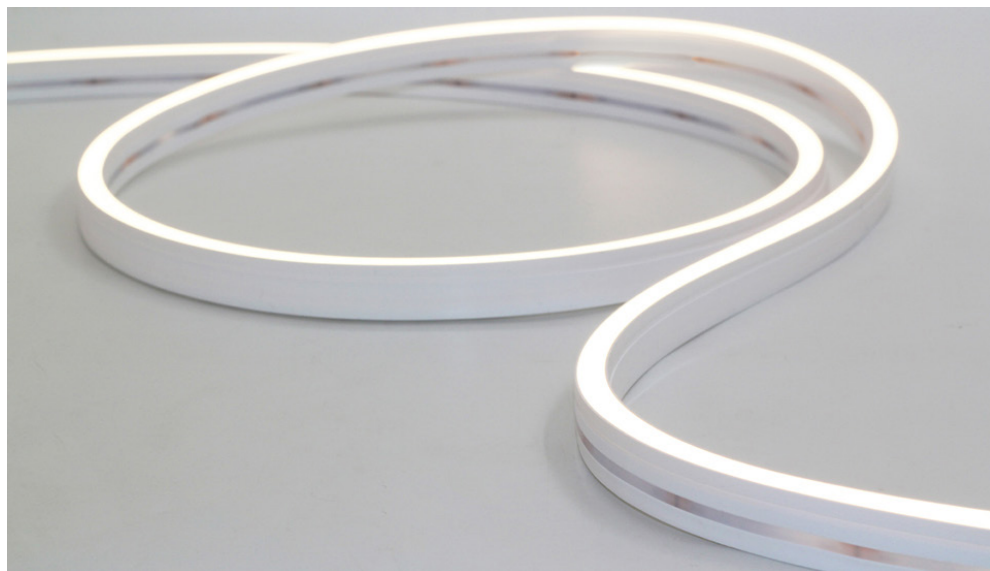

DIMENSION

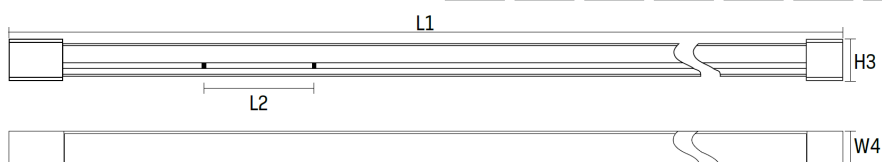

Specifications

L1(mm)	L2(mm)	H3(mm)	W4(mm)
5050	50	18	10


Technical details

2700K	3000K	4000K	5000K	6000K
LUMENS PER METER(lm/M)				
590	590	630	610	610

Applications

Office, showroom, meeting room,
hallway, ...

Updated: July 2019

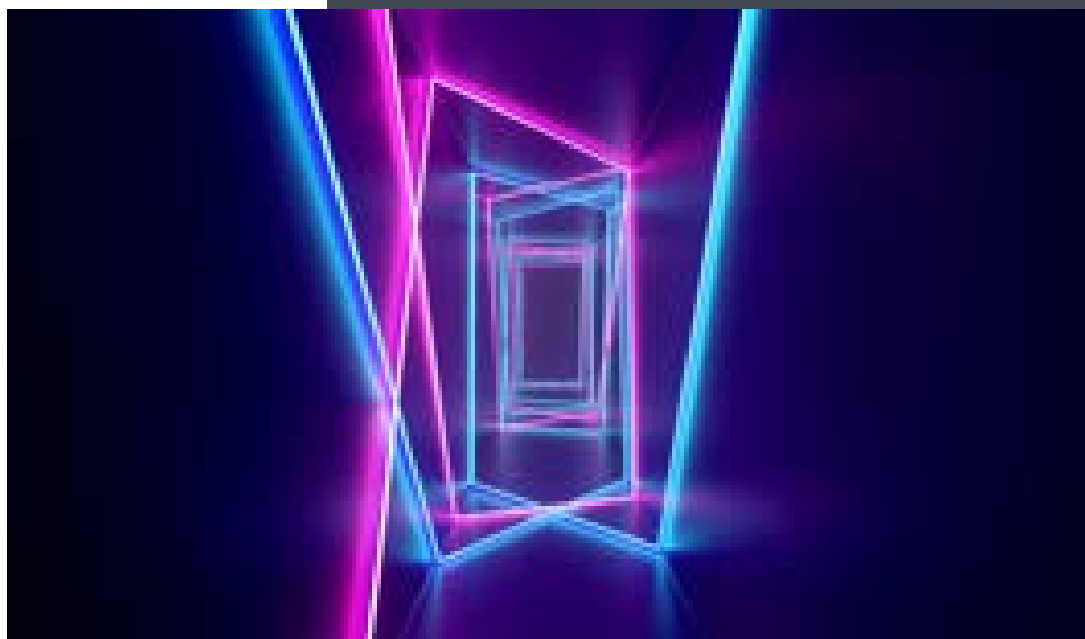



next generation led

info@nextgenerationled.be

www.nextgenerationled.be

Tel + 32 53 71 09 42


Neon strip top view 13x7mm 18W/m IP67

Properties

- Seamless and uniform light output, dot free
- Bendable at vertical direction
- IP67 protection
- Robust housing with high quality silicon, UV proof for true outdoor application



DIMENSION

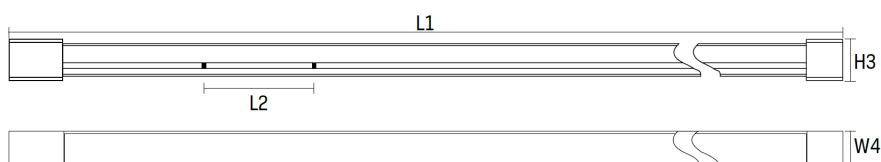

Specifications

L1(mm)	L2(mm)	H3(mm)	W4(mm)
5050	25	7	13

Technical details

● 2700K	● 3000K	● 4000K	● 5000K	● 6000K
LUMENS PER METER(lm/M)				
1240	1250	1270	1290	1290

Applications

Office, showroom, meeting room,
hallway, ...

Updated: July 2019





next generation led

info@nextgenerationled.be
www.nextgenerationled.be
Tel + 32 53 71 09 42


Neon strip top view 10x10mm 14W/m IP67

Properties

- Seamless and uniform light output, dot free
- Bendable at vertical direction
- IP67 protection
- Robust housing with high quality silicon, UV proof for true outdoor application



DIMENSION

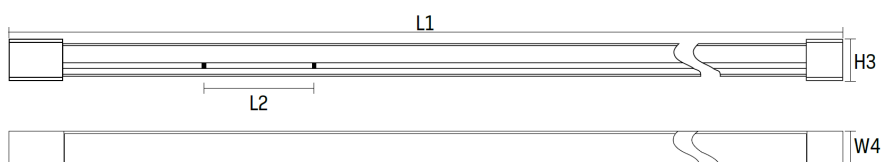

Specifications

L1(mm)	L2(mm)	H3(mm)	W4(mm)
5050	33.3	10	10

Technical details

2700K	3000K	4000K	5000K	6000K
LUMENS PER METER(lm/M)				
930	930	980	950	950

Applications

Office, showroom, meeting room,
hallway, ...

Updated: July 2019





next generation led

info@nextgenerationled.be
www.nextgenerationled.be
Tel + 32 53 71 09 42


Neon strip top view 16x16mm 16W/m IP67

Properties

- Seamless and uniform light output, dot free
- Bendable at vertical direction
- IP67 protection
- Robust housing with high quality silicon, UV proof for true outdoor application



DIMENSION

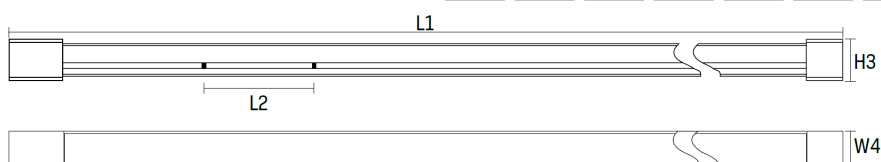

Specifications

L1(mm)	L2(mm)	H3(mm)	W4(mm)
5050	50	16	16

Technical details

● 2700K	● 3000K	● 4000K	● 5000K	● 6000K
LUMENS PER METER(lm/M)				
1090	1090	1150	1100	1100

Applications

Office, showroom, meeting room,
hallway, ...

Updated: July 2019



LED STRIPS

REFERENCE	SIZE	WATT	#LEDS	COLOR	CRI/IP
700-0001	8mm	4.8W/m	60/m	2700K	90/20
700-0002	8mm	4.8W/m	60/m	3000K	90/20
700-0003	8mm	4.8W/m	60/m	4000K	90/20
700-0004	8mm	9.6W/m	120/m	2700K	90/20
700-0005	8mm	9.6W/m	120/m	3000K	90/20
700-0006	8mm	9.6W/m	120/m	4000K	90/20
700-0007	10mm	14.4W/m	60/m	2700K	90/20
700-0008	10mm	14.4W/m	60/m	3000K	90/20
700-0009	10mm	14.4W/m	60/m	4000K	90/20
700-0010	10mm	19.2W/m	120/m	2700K	90/20
700-0011	10mm	19.2W/m	120/m	3000K	90/20
700-0012	10mm	19.2W/m	120/m	4000K	90/20
700-0013	10mm	14.4W/m	60/m	RGB	90/20
700-0014	4mm	7.2W/m	120/m	2700K	90/20
700-0015	4mm	7.2W/m	120/m	3000K	90/20
700-0016	4mm	7.2W/m	120/m	4000K	90/20
700-0017	10mm	12W/m	180/m	2700K	90/20
700-0018	10mm	12W/m	180/m	3000K	90/20
700-0019	10mm	12W/m	180/m	4000K	90/20
700-0020	10mm	15W/m	240/m	2700K	90/20
700-0021	10mm	15W/m	240/m	3000K	90/20
700-0022	10mm	15W/m	240/m	4000K	90/20
700-0023	10mm	18W/m	300/m	2700K	90/20
700-0024	10mm	18W/m	300/m	3000K	90/20
700-0025	10mm	18W/m	300/m	4000K	90/20
700-0026	8mm	9.6W/m	70/m	2700K	98/20
700-0027	8mm	9.6W/m	70/m	3000K	98/20
700-0028	8mm	9.6W/m	70/m	4000K	98/20
700-0029	10mm	19.2W/m	140/m	2700K	98/20
700-0030	10mm	19.2W/m	140/m	3000K	98/20
700-0031	10mm	19.2W/m	140/m	4000K	98/20
700-0032	06x12mm	10W/m	120/m	2700K	90/67
700-0033	06x12mm	10W/m	120/m	3000K	90/67
700-0034	06x12mm	10W/m	120/m	4000K	90/67
700-0035	08x16mm	12W/m	120/m	2700K	90/67
700-0036	08x16mm	12W/m	120/m	3000K	90/67
700-0037	08x16mm	12W/m	120/m	4000K	90/67
700-0038	10x18mm	14W/m	120/m	2700K	90/67
700-0039	10x18mm	14W/m	120/m	3000K	90/67
700-0040	10x18mm	14W/m	120/m	4000K	90/67
700-0041	13x07mm	18W/m	210/m	2700K	90/67
700-0042	13x07mm	18W/m	210/m	3000K	90/67
700-0043	13x07mm	18W/m	210/m	4000K	90/67
700-0044	10x10mm	14W/m	180/m	2700K	90/67
700-0045	10x10mm	14W/m	180/m	3000K	90/67
700-0046	10x10mm	14W/m	180/m	4000K	90/67
700-0047	16x16mm	16W/m	120/m	2700K	90/67
700-0048	16x16mm	16W/m	120/m	3000K	90/67
700-0049	16x16mm	16W/m	120/m	4000K	90/67

LED STRIPS

REFERENCE

700-0050	IP20 strip connector, for signal color 8mm PCB, with wire 0-36V
700-0051	IP20 strip connector, for signal color 8mm PCB, no wire 0-36V
700-0052	IP20 strip connector, for signal color 10mm PCB, with wire 0-36V
700-0053	IP20 strip connector, for signal color 10mm PCB, no wire 0-36V
700-0054	IP20 strip connector, for signal RGB 10mm PCB, with wire 0-36V
700-0055	IP20 strip connector, for signal RGB 10mm PCB, no wire 0-36V
700-0056	1018 Neon Strip/ Input connector
700-0057	0816 Neon Strip/ Input connector
700-0058	0612 Neon Strip/ Input connector
700-0059	1018 Neon Strip/ B2B connector
700-0060	0816 Neon Strip/ B2B connector
700-0061	0612 Neon Strip/ Input connector



- ✓ More than 10 years experience in LED lighting
- ✓ Excellent price/quality ratio
- ✓ Personal contact is important to us
- ✓ Professional advice
- ✓ Designing light studies as desired with accompanying quotation

Feel free to contact us today.
Our expert team is there for you!

Brusselbaan 7, 9320 Aalst/erembodegem
Tel: +32 (0) 53 71 09 42
GSM: +32 (0) 475 733 528
Email: info@nextgenerationled.be

© NEXT GENERATION LED 2019



Fast delivery



Professional advice



Best prices



+32 (0)53710942



www.nextgenerationled.be