



next generation led

info@nextgenerationled.be  
 www.nextgenerationled.be  
 Tel + 32 53 71 09 42

CRI98 19.2W/m  
 10mm 140LED/m  
 IP20

### Properties


- Under constant current condition, brightness output is more stable, life is longer.
- High brightness consistency between different units and batches, more suitable for large projects.
- Highly fitted to the visible spectrum, making the illuminated object closer to the color under natural light.
- Higher Color fidelity, Rf>95.
- Higher color saturation, Rg ≥ 100.
- Low blue light spectrum, healthy lighting.

### Applications

Office, showroom, meeting room, hallway, ...



### DIMENSION

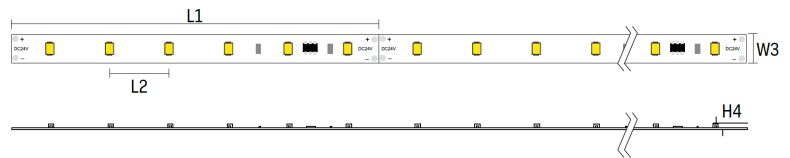

### Specifications

| L1(mm) | L2(mm) | W3(mm) | H4(mm) |
|--------|--------|--------|--------|
| 50     | 8.3    | 10     | 1.4    |

### Technical details

| LUMENS PER METER(lm/M) |       |       |       |       |       |       |
|------------------------|-------|-------|-------|-------|-------|-------|
| 2200K                  | 2400K | 2700K | 3000K | 4000K | 5000K | 6000K |
| -                      | -     | 1480  | 1500  | 1550  | 1520  | 1520  |

Updated: July 2019

