



next generation led

info@nextgenerationled.be
www.nextgenerationled.be
Tel + 32 53 71 09 42

MULTIFUNCTIONAL TM



Properties

- Lifespan L70 %: > 50.000 hours
- Energy savings up to 65%
- Wireless lighting control
- Excellent cooling structure
- Dimmable (1-10V)
- Tilt and rotatable LED modules
- No light pollution
- Flexible light distribution to the desired area
- Swivel bracket installation
- Warranty : 5 years

IP66

Narrow Beam

Tilt & Rotatable

Dimmable

Specifications

MULTI TM	TM040	TM060
Power	40 W	60 W
Luminous intensity	3640 Lm	5460 Lm
Color temperature	3000 K - 4000 K - 5000 K - 6500 K	
Color rendering index	Ra>80	
Beam angle	30°	
Temperature in use	-30° C to + 60° C	
Measurements		
Length	377.2	607.2
Height	330.6	330.6
Width	113.8	113.8
Weight	4.2 kg	4.5 kg


Application

Parking lot, wall pack, billboard, warehouse, building uplighting,...

Updated: August 2017





Specifications

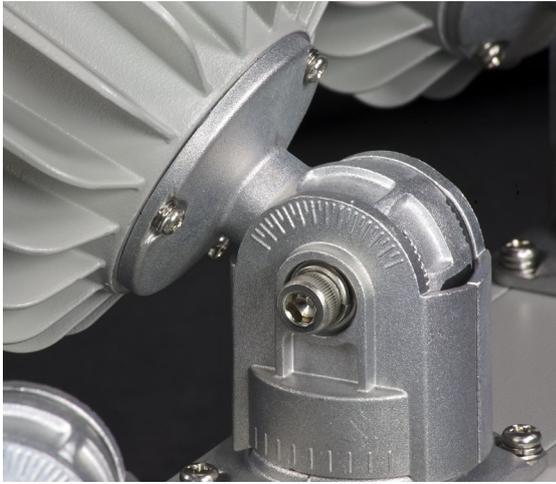

CIE 1931

The CIE color space, developed in 1931, is still used to define colors, and as a reference for other color spaces. The figure is a two-dimensional display of colors of the same intensity (brightness), which is based on observations of color measurements by people.

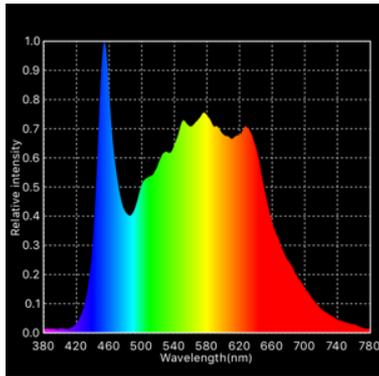
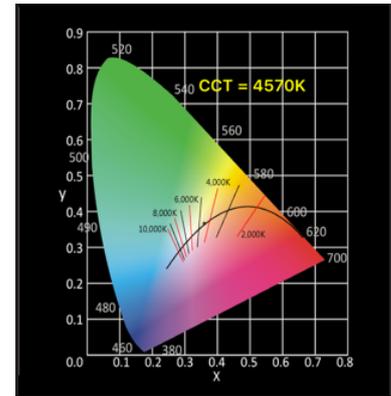


SPECTRUM

Isaac Newton used the Latin word spectrum to define the color series which arose when he dropped a bundle of sunlight through a glass prism. The color spectrum consists of the colors of the rainbow with the color sequence red-orange-yellow-green-blue-indigo-violet, which corresponds to bearish wave length (increasing frequency) of the light waves.

C78 377

ANSI C 78.377 is now the standard for color quality, as determined by the American National Standards Institute. ANSI recommends lamp manufacturers to stay within a 4-step ellipse. This means that manufacturers with a particular focus on the CIE diagram have a broad range of observable differences.

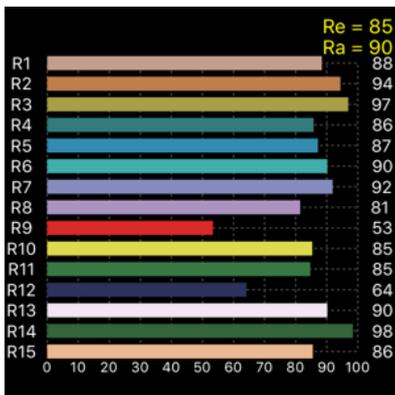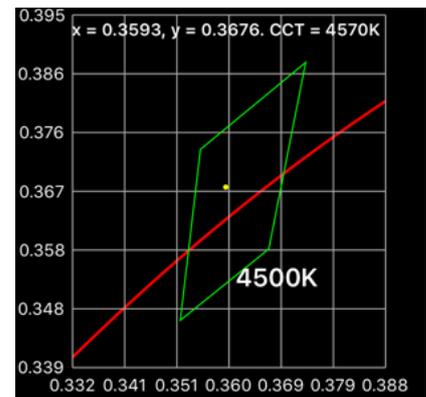

CRI HISTOGRAM

The color reproduction of a light source indicates whether the color of an object can be displayed true to nature. The graph shows whether we can accurately determine color, depending on the color rendering properties of the light source.

Ra = average of R1 to R8

Re = average of R1 to R15

R9 = saturated red. Should be as high as possible.

SDCM



SDCM is an acronym which stands for Standard Deviation Colour Matching. SDCM has the same meaning as a "MacAdam ellipse". A 1-step MacAdam ellipse defines a zone in the CIE 1931 2 deg (xy) colour space within which the human eye cannot discern colour difference. Most LEDs are binned at the 4-7 step level, in other words you certainly can see colour differences in LEDs that are ostensibly the same colour.

SDCM	CCT @ 3000K	ΔUV
1x	±30K	±0.0007
2x	±60K	±0.0010
4x	±100K	±0.0020
7-8x	±175K	±0.0060



ENERGY LABEL

Electrical appliances carry an energy label. This label prints the so-called energy efficiency score in classes. These classes range from 'very energy efficient' (A++) to 'very waste of energy' (E). A more expensive new device may eventually turn out to be cheaper if the energy score is good. IPEA is the new system for luminaire energy efficiency assessment.

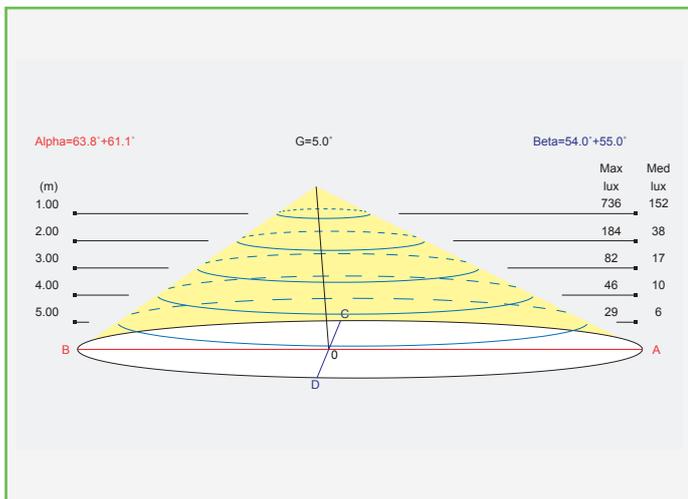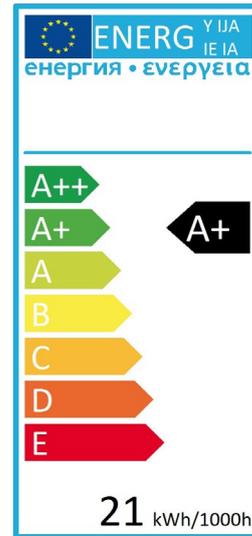


BEAM

The Illuminance Cone Diagram indicates the maximum illuminance at different distances from the fixture.

POLAR DIAGRAM

The polar luminous intensity graph illustrates the distribution of luminous intensity, in candelas, for the transverse (solid line) and axial (dashed line) planes of the luminaire. The shown curve provides a visual guide to the type of distribution expected from the luminaire e.g. wide, narrow, direct, indirect... in addition to intensity.

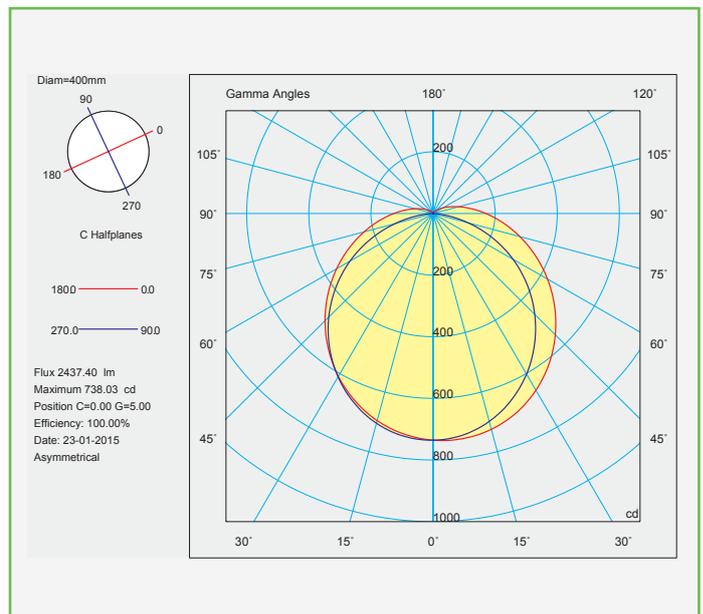

MULTIFUNCTIONAL TM

REFERENCE	WATT	MODULES	COLOR	LUMEN	DIMMABLE
170-0126	40 W	2	4000 K	3640 Lm	Optional
170-0127	40 W	2	5000 K	3640 Lm	Optional
170-0128	60 W	3	4000 K	5460 Lm	Optional
170-0129	60 W	3	5000 K	5460 Lm	Optional

